


低倍率遠心鏡頭

LOW MAGNIFICATION

Feature:

Magnification 0.1-1.0
 Working distance 90-350mm
 Thin diamond 16mm
 High optical performance
 Standard C-Mount
 Prior to CCTV Lenses

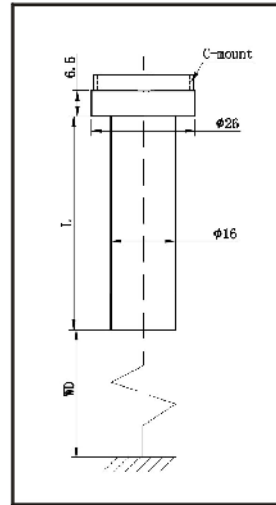

Applications:

Universal FA uses
 Parts alignment
 Parts recognition

Low Magnification C-mount, CCD Size=1/2

A:non-coaxial

Model	β	WD (mm)	L (mm)	Resolution (μ m)	Depth of field (mm)	FNo	TV Distortion
WWL03-260A	0.3	260 \pm 5	56.2	25.0	4.5	8.5	\leq 0.5%
WWL03-180A	0.3	180 \pm 4	31.3	16.5	4.3	6.0	\leq 0.5%
WWL05-260A	0.5	260 \pm 5	111.0	25.0	3.2	14.0	\leq 0.3%
WWL05-130A	0.5	130 \pm 3	50.0	12.2	2.8	7.0	\leq 0.4%
WWL08-200A	0.8	200 \pm 4	88.0	17.8	2.1	21.0	\leq 0.3%
WWL08-105A	0.8	105 \pm 3	66.0	9.5	1.7	11.0	\leq 0.3%
WWL10-180A	1.0	180 \pm 4	86.5	17.8	1.5	20.0	\leq 0.2%
WWL10-090A	1.0	90 \pm 2	72.0	8.8	1.1	10.0	\leq 0.2%